

# SOT-23 Plastic-Encapsulate MOSFETS BC2302 N-Channel 20-V(D-S) MOSFET

#### **FEATURE**

TrenchFET Power MOSFET

**Equivalent Circuit** 

## SOT-23

1. GATE 2. SOURCE

3. DRAIN

MARKING CODE: "2302" OR "S2"

#### **APPLICATIONS**

- Load Switch for Portable Devices
- DC/DC Converter

### **~()** '

#### Maximum ratings (T<sub>a</sub>=25°C unless otherwise noted)

Parameter	Symbo	Value	Unit	
Drain-Source Voltage	V <sub>DS</sub>	20	V	
Gate-Source Voltage	$V_{GS}$	±8		
Continuous Drain Current	I <sub>D</sub>	2.1	А	
Continuous Source-Drain Current(Diode Conduction)	Is	0.6		
Power Dissipation	P <sub>D</sub>	0.35	W	
Thermal Resistance from Junction to Ambient (t≤5s)	$R_{\theta JA}$	357	°C/W	
Operating Junction	TJ	150	°C	
Storage Temperature	T <sub>STG</sub>	-55 ~+150		

Page 1 of 5 REV02: 11/2021



#### Electrical characteristics (T<sub>a</sub>=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Тур	Max	Units
Static	•					
Drain-source breakdown voltage	V <sub>(BR)DSS</sub>	Vgs = 0V, ID =10μA	20			V
Gate-threshold voltage	VGS(th)	VDS =V <sub>GS</sub> , ID =50μA	0.50	0.85	1.2	
Gate-body leakage	I <sub>GSS</sub>	Vps =0V, Vgs =±8V			±100	nA
Zero gate voltage drain current	I <sub>DSS</sub>	Vps =20V, Vgs =0V			1	μA
Drain-source on-resistance <sup>a</sup>	rDS(on)	Vgs =4.5V, ID =3.6A	/, ID =3.6A 0.045		0.060	Ω
		Vgs =2.5V, Ip =3.1A		0.070	0.115	77
Forward transconductance <sup>a</sup>	<b>G</b> fs	Vps =5V, Ip =3.6A		8		S
Diode forward voltage	V <sub>SD</sub>	I <sub>S</sub> =0.94A,V <sub>GS</sub> =0V		0.76	1.2	V
Dynamic	•					
Total gate charge	Qg			4.0		nC
Gate-source charge	Q <sub>gs</sub>	Vps =10V,Vgs =4.5V,Ip =3.6A		0.65		
Gate-drain charge	$Q_{gd}$			1.5		
Input capacitance b	C <sub>iss</sub>			300		pF
Output capacitance <sup>b</sup>	Coss	Vps =10V,Vgs =0V,f=1MHz		120		
Reverse transfer capacitance <sup>b</sup>	C <sub>rss</sub>			80		
Switching <sup>b</sup>						
Turn-on delay time	t <sub>d(on)</sub>	101/		7	15	ns ns
Rise time	tr	V <sub>DD</sub> =10V,		55	8	
Turn-off delay time	td(off)	R <sub>L</sub> =5.5Ω, I <sub>D</sub> ≈3.6A, V <sub>GEN</sub> =4.5V,Rg=6Ω		16	6	
Fall time	tf	V GEN-4.5 V, NY=012		10	2	

#### Notes:


a. Pulse Test : Pulse width≤300µs, duty cycle ≤2%.


b. These parameters have no way to verify.


Page 2 of 5 REV02: 11/2021




### **Typical Characteristics**

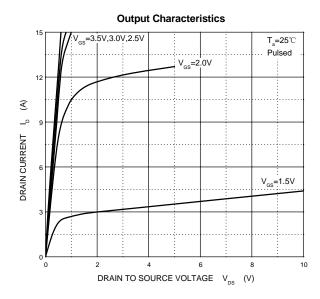

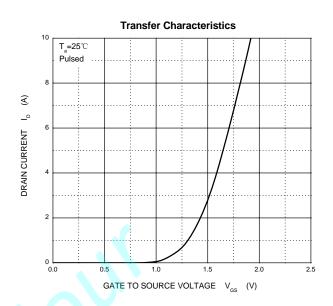

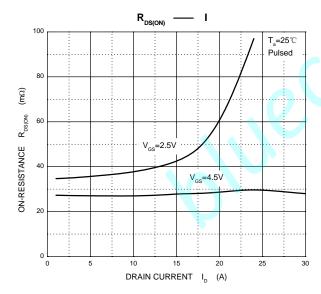

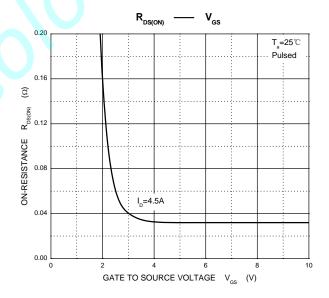


Page 3 of 5 REV02: 11/2021



#### **PACKAGE OUTLINE**

#### Plastic surface mounted package; 3 leads

SOT-23

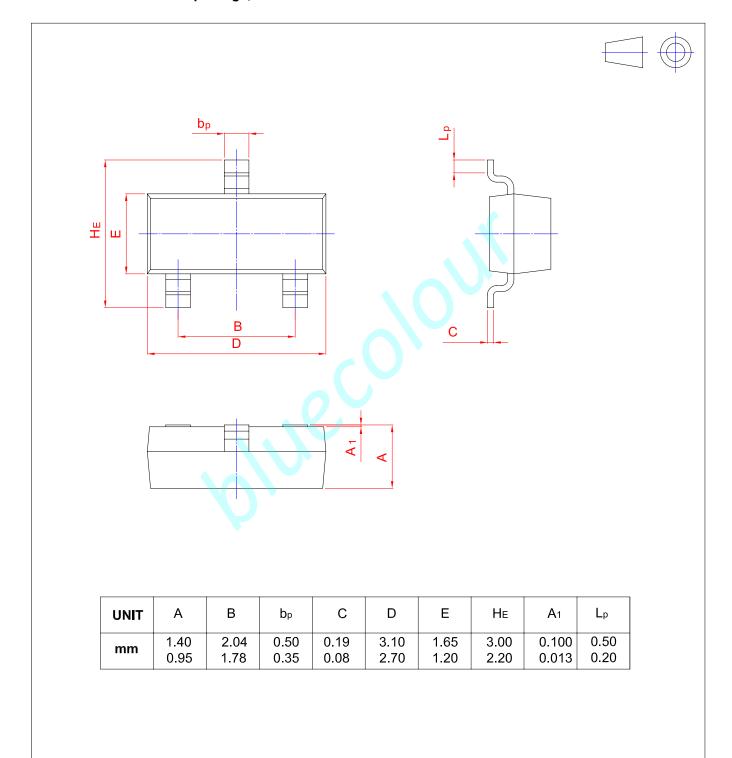

Page 4 of 5 REV02: 11/2021



#### www.bluecolour.cn

#### **DISCLAIMER**

- Before you use our Products, you are requested to carefully read this document and fully understand its
  contents. BLUECOLOUR shall not be in any way responsible or liable for failure, malfunction or
  accident arising from the use of any BLUECOLOUR's Products against warning, caution or note
  contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using BLUECOLOUR's Products, please confirm the latest information with a BLUECOLOUR sales representative.

Page 5 of 5 REV02: 11/2021